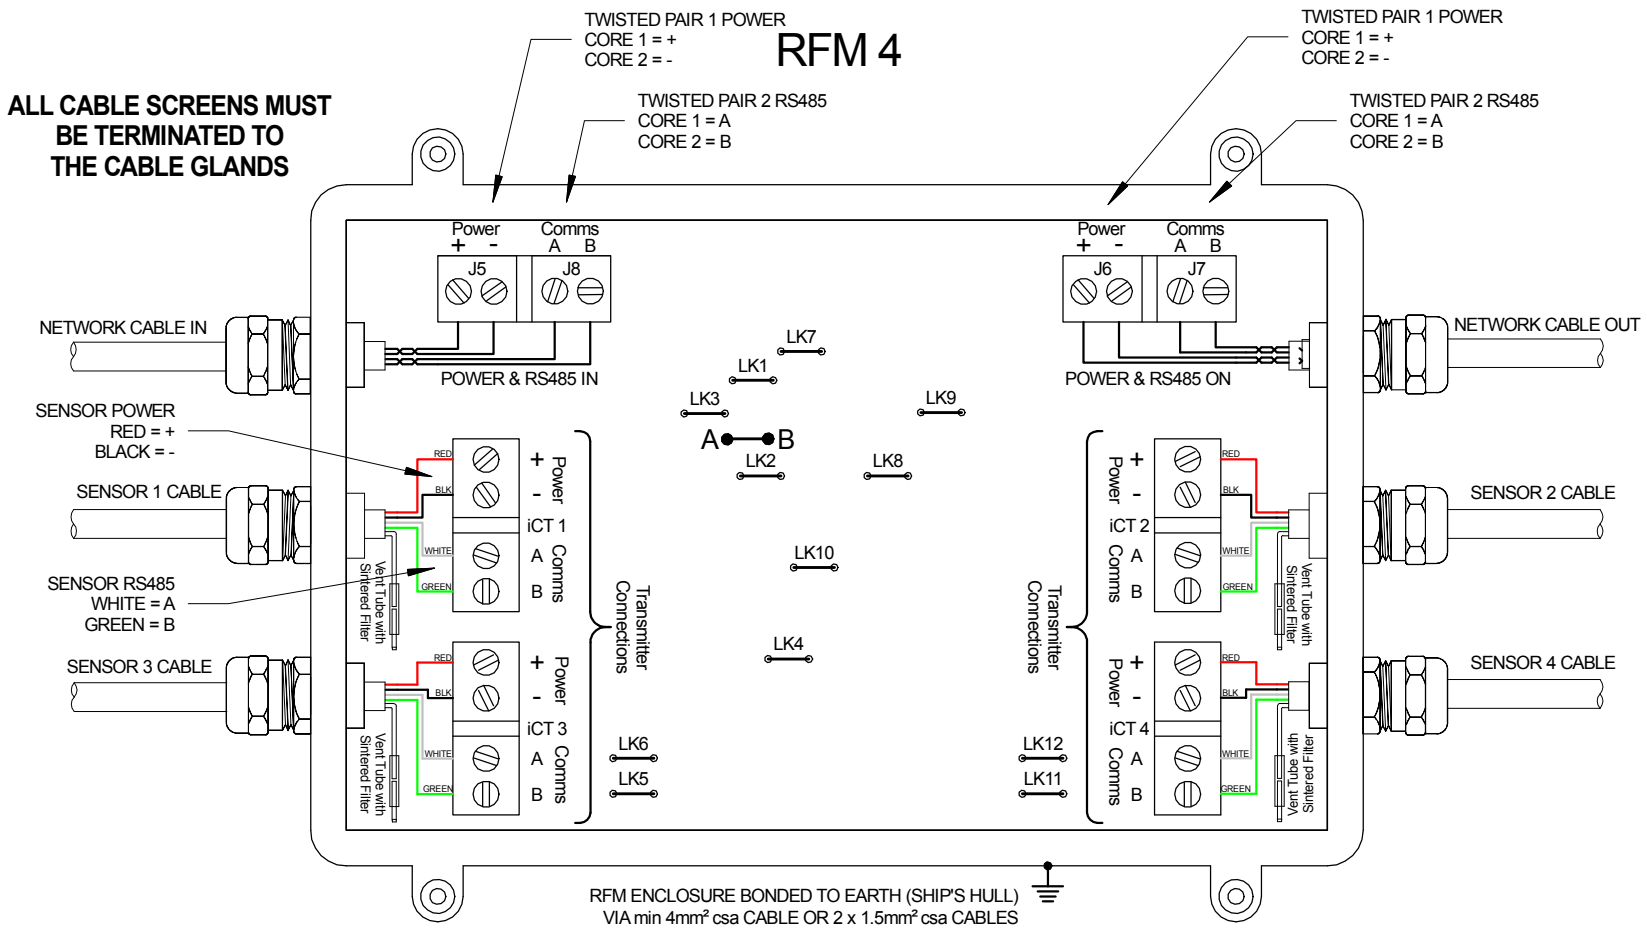

NOTE 1 : ALL NETWORK CABLES ARE TO BE 4 CORE (2 X TWISTED PAIR) WITH OVERALL BRAIDED SCREEN

NOTE 2 : ALL CABLE SCREENS MUST BE CORRECTLY TERMINATED TO CABLE GLANDS

NOTE 3 : ALL CABLES (NETWORK AND SENSOR) MUST USE THE DESIGNATED CABLE GLAND ENTRY POINT

ALL UNUSED CABLE GLANDS MUST BE FITTED WITH A BLANKING PLUG

SCALE NTS

FINISH

MATERIAL AND SPECIFICATION

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE STATED

TOLERANCES UNLESS OTHERWISE STATED +/- 0.1 ANG +/-2

ISSUE	DATE	TCR	DRAWN	CHECKED
A	03-10-19		SAL	MVJ

PSM INSTRUMENTATION LTD

PART OF THE scanjet GROUP

TITLE

RFM4 ENCLOSURE AND WIRING DRAWING

Datasheet DAT30

DRAWING No

S-001488-RFM-GA

SALES DRAWING ONLY

SHT 1 OF 1

A4