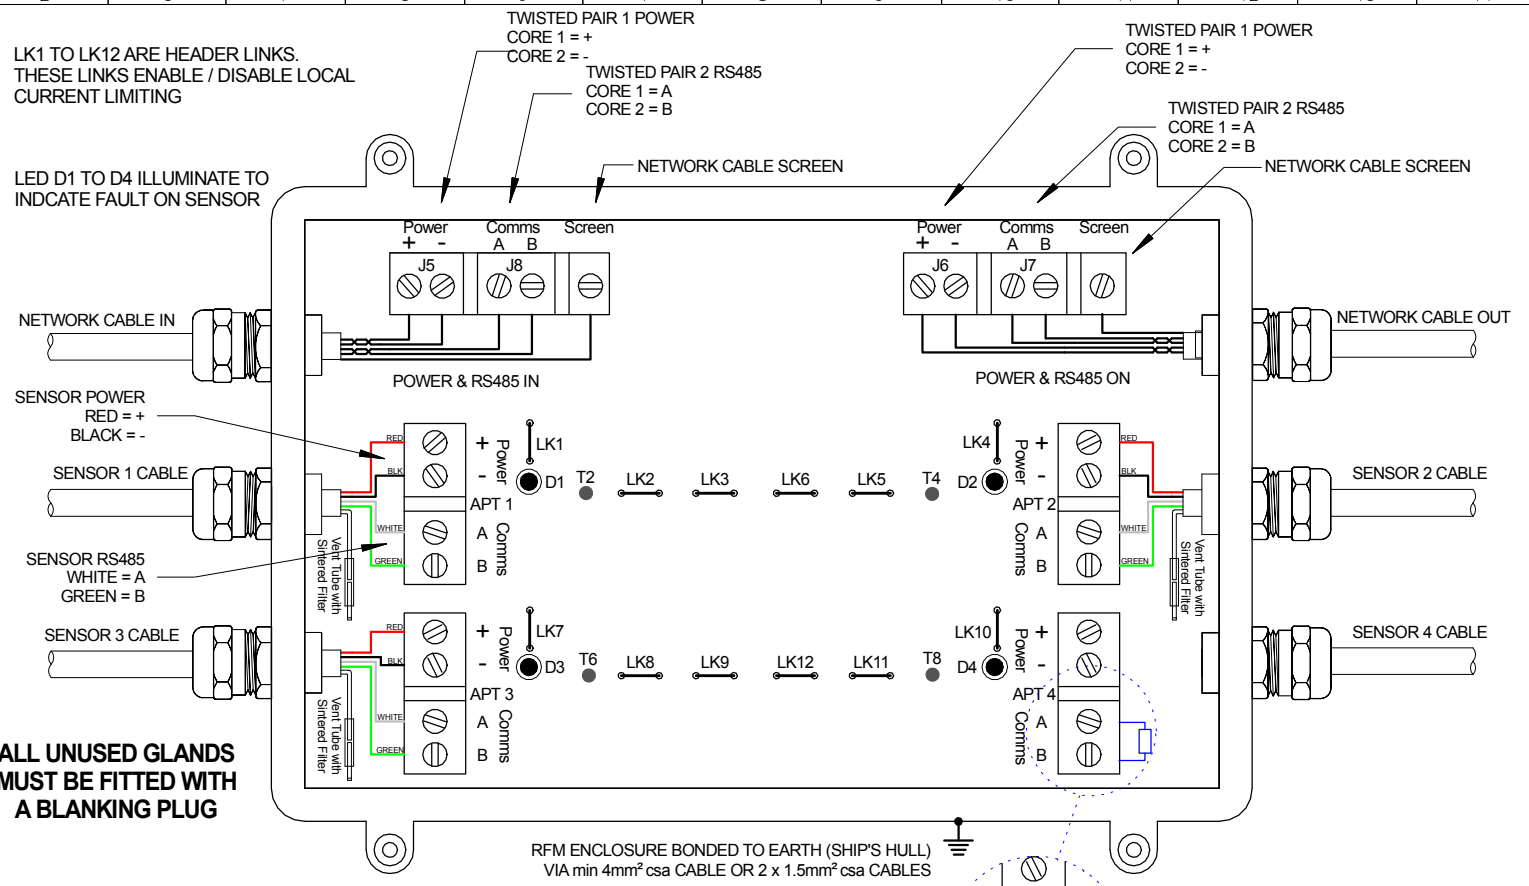

NOTE 1 : ALL NETWORK CABLES ARE TO BE 4 CORE (2 X TWISTED PAIR) WITH OVERALL BRAIDED SCREEN

NOTE 2 : ALL APT SENSOR CABLE SCREENS MUST BE CORRECTLY TERMINATED TO CABLE GLANDS NETWORK AND POWER CABLE SCREEN MUST BE PASSED THROUGH THE CABLE GLAND AND TERMINATED TO THE SCREEN TERMINATION

NOTE 3 : ALL CABLES (NETWORK AND SENSOR) MUST USE THE DESIGNATED CABLE GLAND ENTRY POINT

NOTE 4 : ENSURE THAT CABLE VENT IS NOT KINKED OR OBSTRUCTED

SCALE	NTS	FINISH	
MATERIAL AND SPECIFICATION			
ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE STATED			
TOLERANCES UNLESS OTHERWISE STATED	+/- 0.1	ANG +/-2	
ISSUE	B		
DATE	29-11-24		
TCR			
DRAWN	SAL		
CHECKED	MJ		

scanjet PSM an Alfa Laval branc

PSM INSTRUMENTATION LTD

TITLE

RFM4 Enclosure
& Wiring Connections

Datasheet DAT30

DRAWING No

S-001488-RFM-GA

SALES DRAWING ONLY

SHT 1
OF 1

A4