SALES DRAWING ONLY
NOT TO BE USED FOR MANUFACTURE

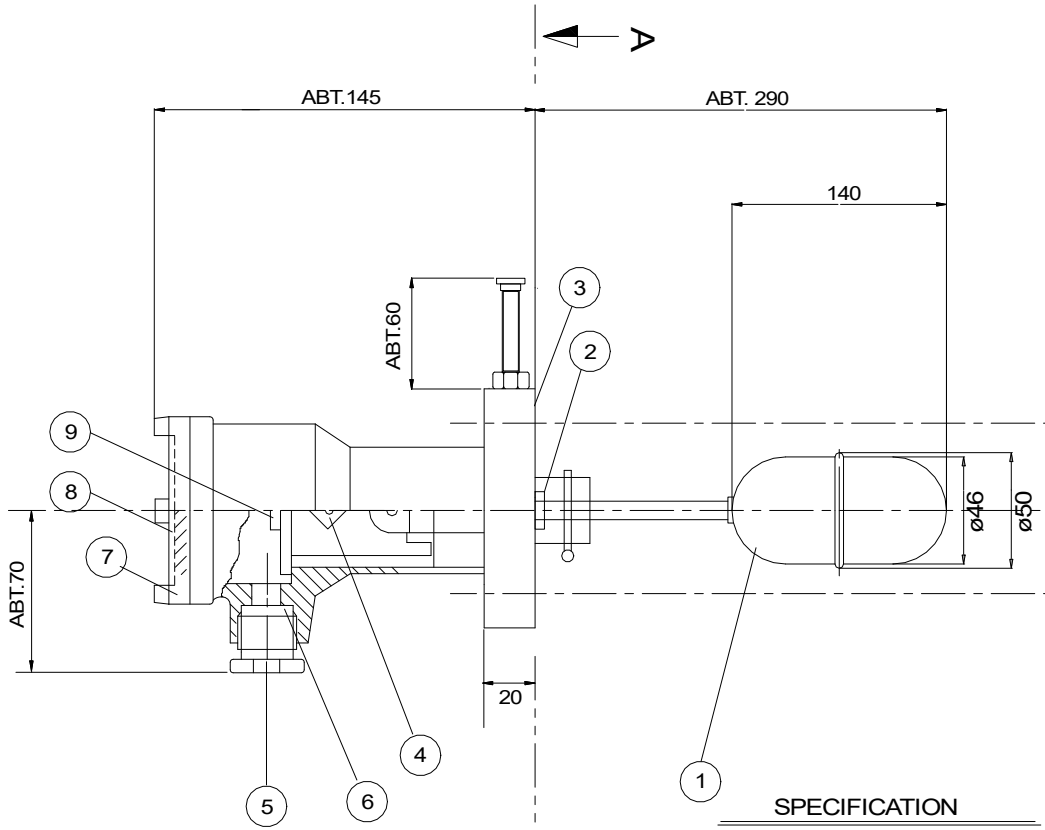


## VIEW A-A'

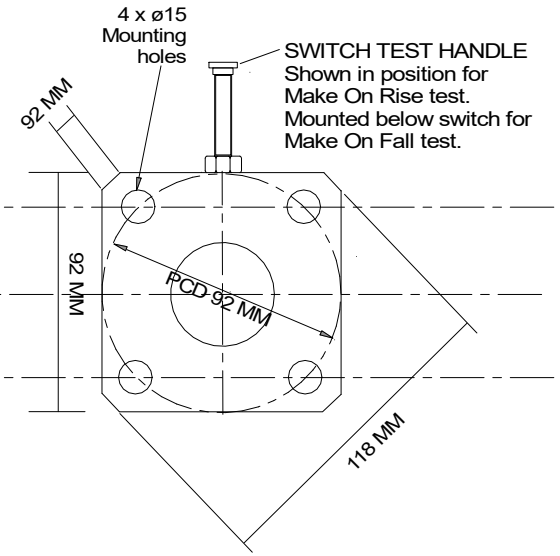


## SPECIFICATION

| | |
|---|---|
| DUTY | LIQUID |
| MOUNTING | SIDE MOUNTING |
| MAX. PRESS | 7bar |
| MAX.TEMP | 120°C |
| SWITCH | SPDT<br>250VAC / 30V DC - 3A |
| IP GRADE | 65 |
| HOUSING | EPOXY COATED ALUMINIUM |
| COLOUR | MUNSELL No. 7.5 BG 7/2 |

| | TERMINAL | MATERIAL |
|---|---|---|
| 9 | NAME PLATE | BS |
| 8 | COVER | ALC |
| 7 | GLAND PACKING | RUBBER |
| 6 | CABLE GLAND | BS |
| 5 | MICRO SWITCH | |
| 4 | FLANGE | SUS304 |
| 3 | MAGNET | ALNICO |
| 2 | FLOAT | SUS304 |
| 1 | | |

## WIRING DIAGRAM

C-A MAKES ON RISING LEVEL




C-B MAKES ON FALLING LEVEL




| ISSUE | A | B | C |
|---|---|---|---|
| DATE | 07-06-11 | 25-06-18 | 26-04-21 |
| DCR. | | | |
| DRAWN | MVJ | MVJ | SAL |
| CHECKED | | | MVJ |

PSM Instrumentation Ltd
Haywards Heath,West Sussex RH16 1TW
ph: 44 (0) 1444 410040 f: 44 (0) 1444 410121
http://www.psmmarine.com

| SCALE | | TITLE | DRAWING NO | | |
|---|---|---|---|---|---|
| NTS | UNLESS OTHERWISE STATED DIMENSIONS ARE IN MILLIMETRES / ~~INCHES~~ | Side Mount Float Switch<br>With Test Handle<br>KD12 HD-W-T-A | S-001348-SW-GO | A4 | SHT 1<br>OF 1 |